

Installing the Soft Anchor

What you will need:

The soft anchor assembly (soft anchor, SS washer, rubber washer)


Pulling cord

Bulkhead with $\frac{1}{4}$ " hole drilled and sanded


And less than 5 minutes

Step 1: Unpackage the soft anchor from the plastic bag it came in


Step 2: Remove the rubber washer (if the SS washer is not installed, install it now)

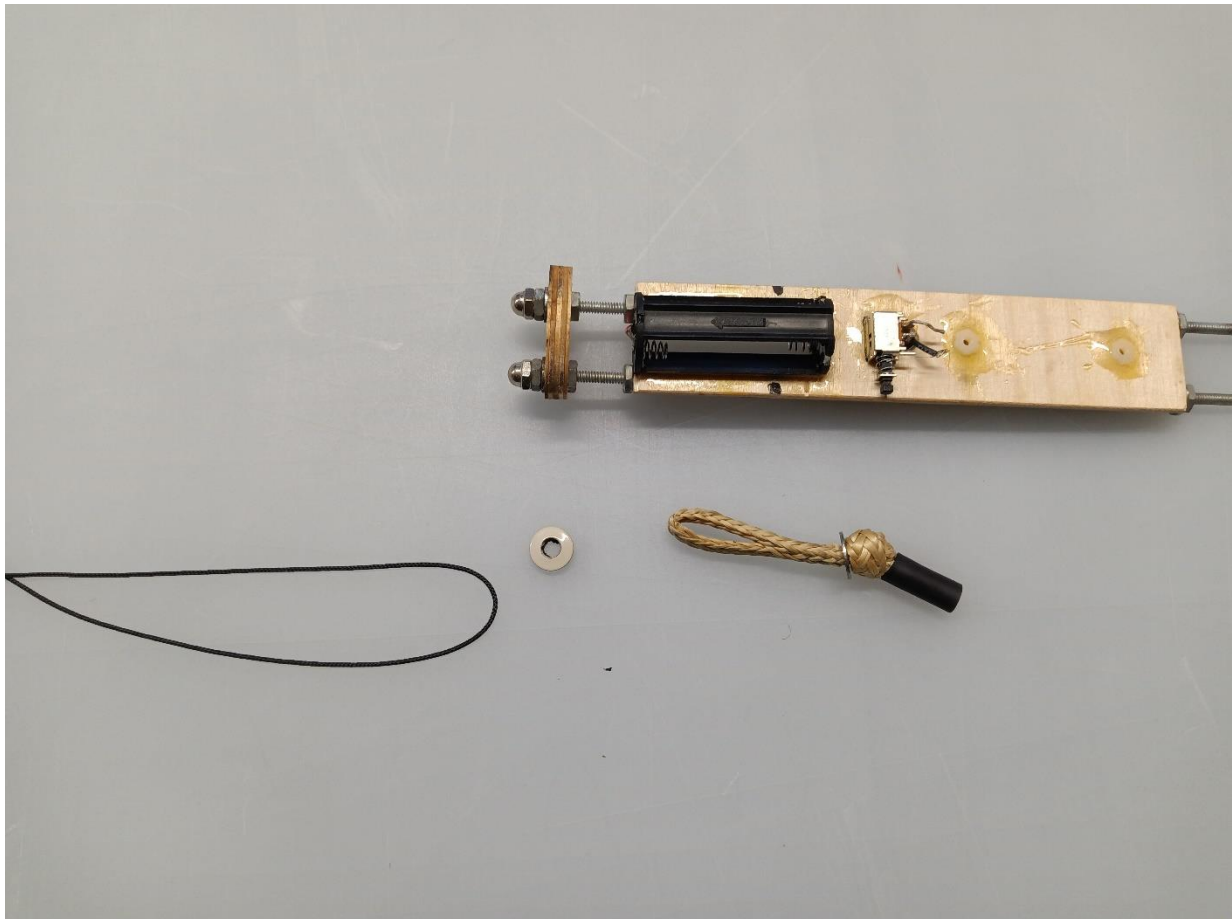

Step 3: Route the pull through cord through the loop in the soft anchor and then feed both ends of the pull through cord through the anchor hole in the bulkhead.

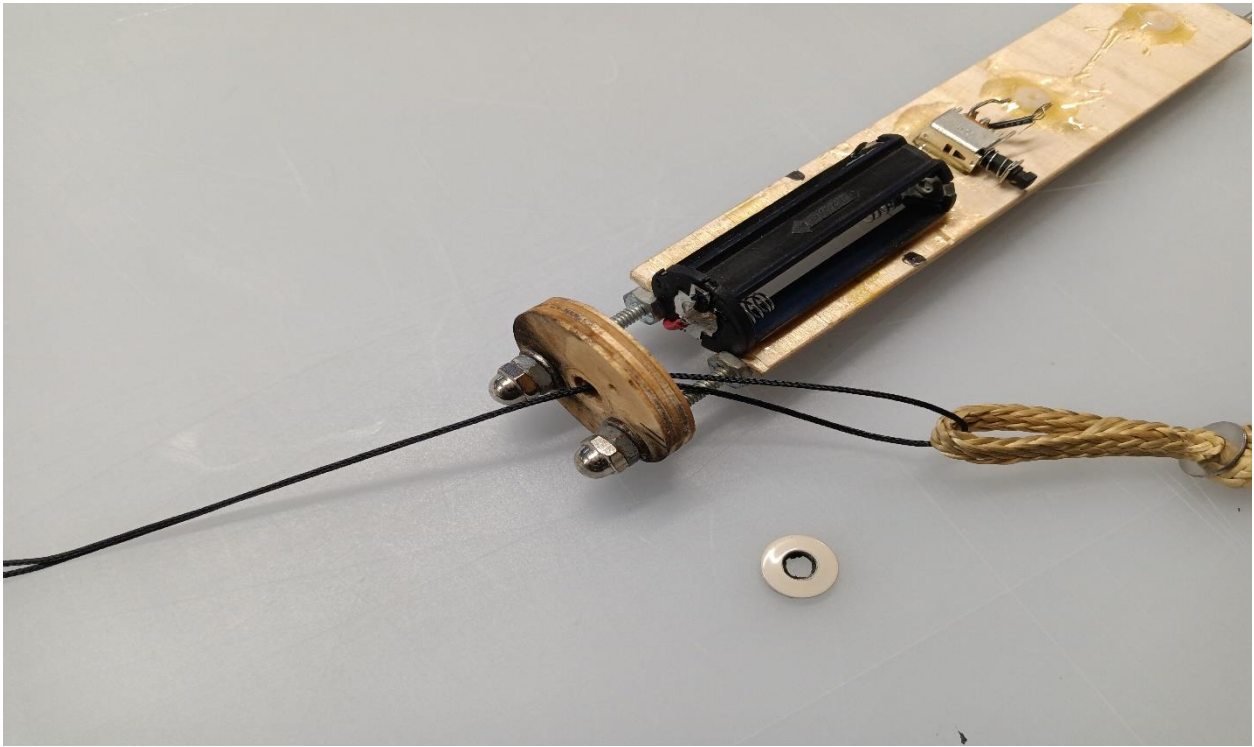

Step 4: Pull the pull through cord until the soft anchor has fed through the bulkhead and the SS washer is flush against the backside of the bulkhead.

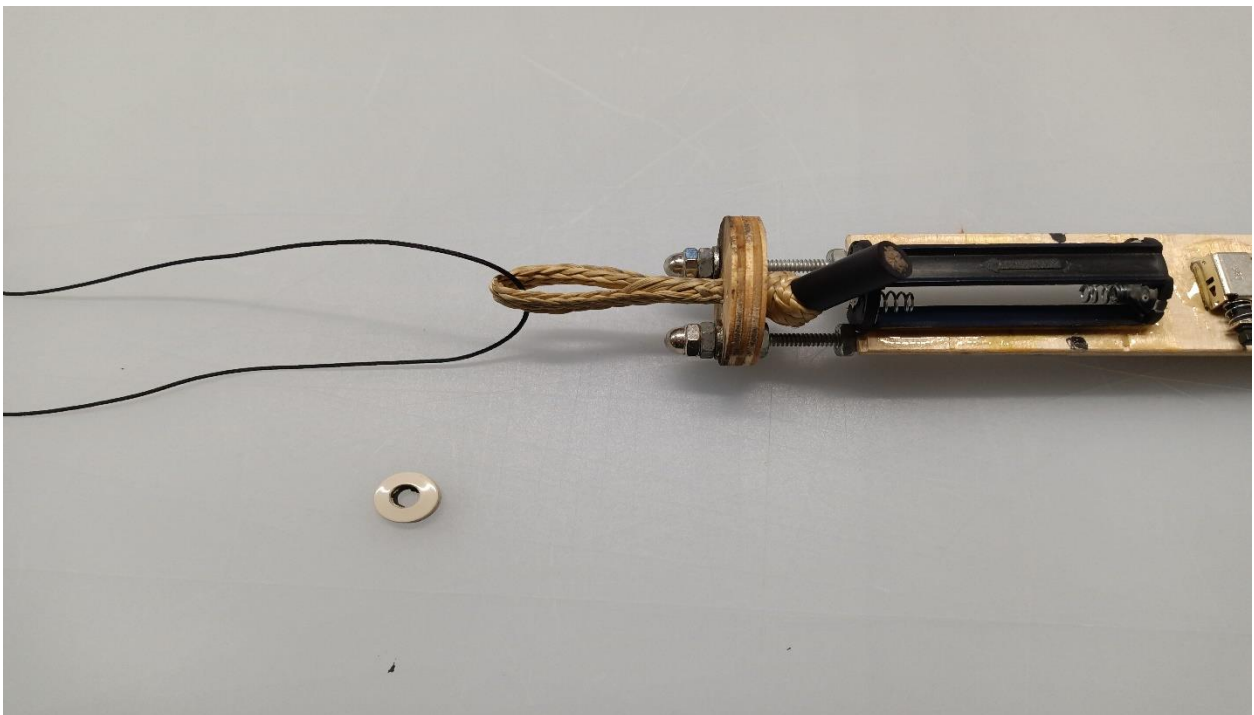

Step 5: Leave the pull through cord routed through the soft anchor and route the pull through cord's ends through the rubber washer, and pull the cord while pushing the rubber grommet flush to the face of the bulkhead.





Step 6: Remove the pull through cord and the installation is complete. Remember to inspect before each flight.

